



MARCH PUMPS

1819 PICKWICK AVE., GLENVIEW, IL 60026-1306, U.S.A
 PHONE: (847) 729-5300 - FAX: (847) 729-7062
 WWW.MARCHPUMP.COM

DESCRIPTION & OPERATION: The March 821 Series hot water booster units are centrifugal magnetic drive pumps that are built to handle liquid transfer in heating and cooling operations. Contact the factory for application assistance. Pumps are not self priming, lack a suction lift, and thus require a flooded suction. Pumps cannot be run dry.


INSTALLATIONS: The pumps should be installed with the pump housing arrow pointing in the direction of flow within the system. If the arrow indicating flow is not in the direction required, remove the socket head housing screws holding the housing to the motor bracket and rotate the housing assembly as required. Replace the screws and tighten. The pump is composed of a wet end assembly, which can be separated by unscrewing the socket head housing screws. The pump will then separate into 2 parts. The liquid will be contained within the wet end assembly unless the flat head connecting screws on the rear housing are loosened.

GENERAL SAFETY INFORMATION: Follow all local safety codes & the Occupational Safety and Health Act (OSHA). Make certain that the power source conforms to the requirements of your equipment. Always disconnect power source before performing any work on or near the electric motor. Caution must be exercised to relieve any pressure in the system & in draining hot liquid from the pump or the system.

DISASSEMBLY & REASSEMBLY: The motor can be removed from the wet end assembly without draining the liquid from the system. To do so remove four socket head housing screws and slide the motor assembly away. If parts inside the wet end assembly must be removed, isolate the pump or drain the system. When the system is drained and cool, remove the four flat head connecting screws from the rear of the housing. The rear housing can now be removed. Remaining pump parts can be removed. Replace any worn or damaged parts. Replace the gasket anytime the rear housing is removed.

ELECTRICAL: Motors are air cooled and have a conduit box for electrical connections. Motors are available in different electrical configurations such as 115 Volt 50/60Hz or 230 Volt 50/60Hz, 1 Phase. The motors are U.L. listed and rated for continuous duty.


821-SS-T

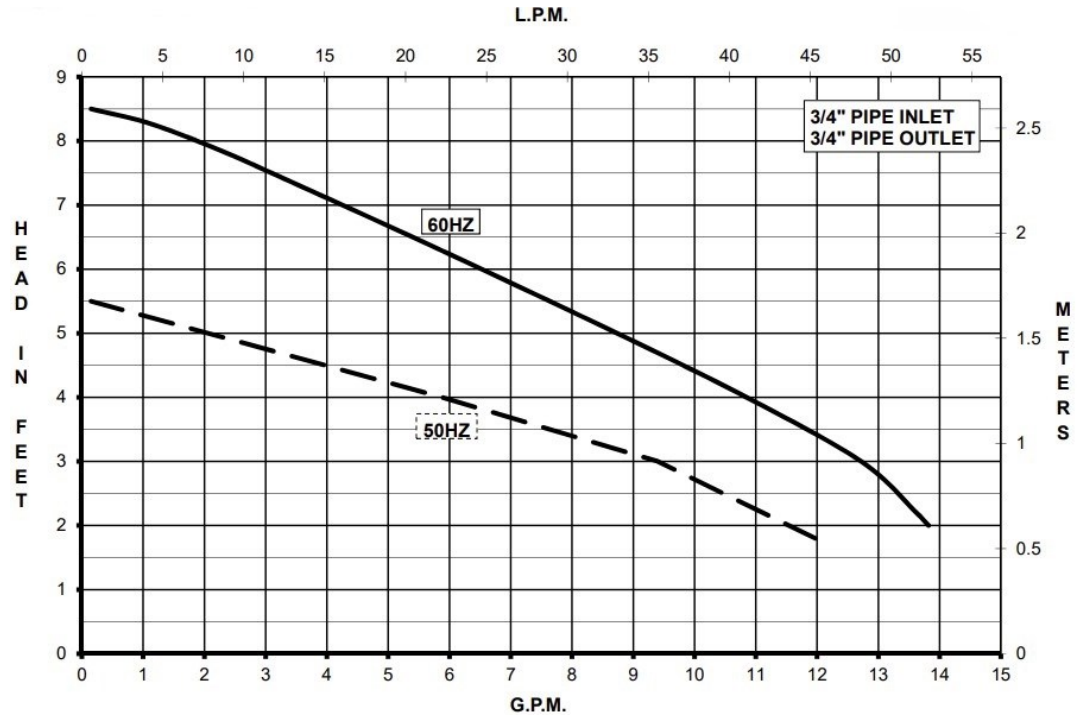

| Specifications | 821-SS-T | |
|------------------------|-------------------|----------------|
| Product | 115V | 0821-0113-0100 |
| | 230V | 0821-0114-0100 |
| Inlet-Outlet | 3/4:FPT-3/4" FPT | |
| Max Internal Pressure | 150PSI (1034 kPa) | |
| Max Liquid Temperature | 250F (121C) | |

| Model | 60Hz | | | | | | | | | | | | 50Hz | | | | | | | | | | | | Packed Weight Pounds |
|----------|----------|-----|----------|-----|-----|------------|------------|------------|------|-------|------|-----|----------|------|----------|-----|----|------------|------------|------|-------|------|----|--|-------------------------|
| | Max Flow | | Max Head | | | Electrical | | | | | | | Max Flow | | Max Head | | | Electrical | | | | | | | |
| | GPM | LPM | FT | PSI | M | Ph | V | A | HP | kW | RPM | GPM | LPM | Feet | PSI | M | Ph | V | A | HP | kW | RPM | | | |
| 821-SS-T | 14 | 53 | 8.5 | 3.6 | 2.6 | 1 | 115 or 230 | 1.6 or 0.8 | 1/20 | 0.037 | 1600 | 12 | 45.4 | 5.2 | 2.2 | 1.6 | 1 | 115 or 230 | 1.8 or 0.9 | 1/20 | 0.037 | 1350 | 12 | | |

All specifications & data are based on pumping water & are intended as a guideline only. Specifications may vary with different motors.

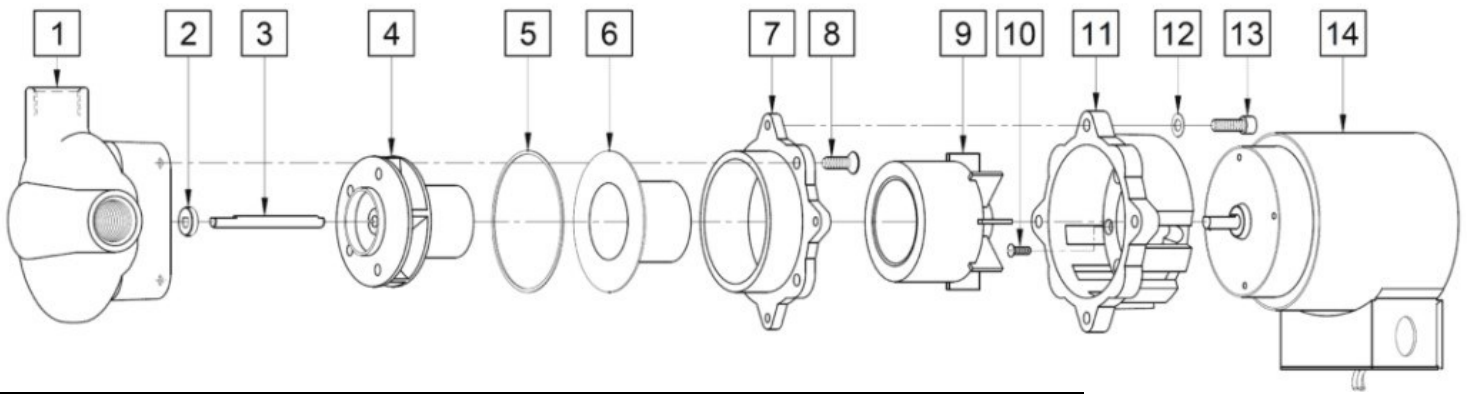

| 821-SS-T | | | |
|--|----------------|---------|--|
| Item | Part Number | QTY REQ | Description |
| 1 | 0821-0112-0010 | 1 | Pump Housing with 3/4" Threaded Inlet and Outlet (Stainless Steel) |
| 2 | 0821-0079-1000 | 1 | Thrust Washer (Ceramic) |
| 3 | 0821-0036-1000 | 1 | Shaft (Stainless Steel) |
| 4 | 0821-0023-0200 | 1 | 2.875 Diameter Impeller with Bushing (Ryton/Carbon) |
| 5 | 0804-0050-1000 | 1 | 2.968" ID x 0.031" Thick Gasket (Nitrile/Fibre) |
| 6 | 0821-0035-0100 | 1 | Rear Housing (304 Stainless Steel) |
| 7 | 0821-0044-0001 | 1 | Housing Connecting Ring (Aluminum) |
| 8 | 1043-0009-1000 | 4 | 1/4"-20 x 3/4"Lg. Flat Head Connecting Screw (Steel) |
| 9 | 0821-0086-0100 | 1 | Drive Magnet |
| 10 | 0210-0028-1000 | 4 | #8-32 x 1/2" Long Flat Head Screw (Stainless) |
| 11 | 0821-0106-1000 | 1 | Motor Bracket (Plastic) |
| 12 | 0155-0021-1000 | 4 | 1/2"OD Washer (Stainless) |
| 13 | 0804-0052-1000 | 4 | 1/4"-20 x 3/4" LG. Socket Head Housing Screw (Steel) |
| 14 | 0821-0084-1000 | 1 | Motor, 1 Phase, 115V, 50/60 Hz |
| 14 | 0821-0088-1000 | 1 | Motor, 1 Phase, 230V, 50/60 Hz |
| Materials in contact with the liquid: | | | |
| 821-SS: 304SS, Ceramic, Nitrile/Fibre, 303SS, Ryton/Teflon/Carbon | | | |
| NOTE: Contact Factory for other materials and/or parts not listed. Special voltage motors are available upon special order. | | | |
| LUBRICATION: The 821 motor should be oiled at least once a year at the start of the heating season with 4 or 5 drops of SAE 20 weight non-detergent oil in each bearing. If the pump is used daily, it should be oiled every six months. Do not over oil. No oiling is required on ball bearing motors. | | | |

0821-0063-1200